

Product Catalog- Eco

Shock absorber

YASUSU SUSPENSION

MOTORCYCLE AND SCOOTER



YASUSU SUSPENSION

M19 SERIES**M19-CD**

Spring rate:
70lbs/in (optional)

Center length:
330mm(optional)

Shock absorber specification and features-

Specification

φ19mm damper
Dual tube oil loop design
φ8mm SAE4140 shaft
Wide range of bolt sizes

Features

Exclusively for twin shock absorbers motorbike
Electroplating chrome style surface treatment
Feel comfortable while riding
Wide range of spring and length

YASUSU SUSPENSION

M30 SERIES**M30-V**

Spring: Black
100lbs/in (optional)

Center length:
270mm(optional)

Shock absorber specification and features-

Specification

- φ30mm damper
- Dual tube oil loop design
- φ10mm SAE4140 shaft
- φ10mm, φ12mm or φ14mm bolt sizes are available
- Clevis head is available
- 5 segments preload adjustment

Features

- Exclusively twin shock absorbers motorbike design
- Dual spring rate(optional)
- Electroplating chrome style surface treatment(optional)
- Instant response performance
- Feel comfortable while riding
- Easy spring preload adjustment
- Wide range of spring and length

M30 SERIES



M30-S

Spring: Chrome
85lbs/in (optional)

Center length:
300mm(optional)



M30-G

Spring: Chrome
100lbs/in (optional)

Center length:
310mm(optional)

YASUSU SUSPENSION

M30 SERIES



M30-B

Spring: Chrome
100lbs/in (optional)

Center length:
320mm(optional)



M30-K

Spring : Black
100lbs/in (optional)

Center length:
350mm(optional)

YASUSU SUSPENSION

M30 SERIES



M30-9R

Spring rate:
85lbs/in (optional)

Center length:
300mm(optional)



M30-C

Bottom clevis head for scooter

Spring Red
85lbs/in (optional)

Center length:
325mm(optional)

YASUSU SUSPENSION

M30 SERIES

Spring: Black
100lbs/in

Center length:
325mm(optional)

M30-R

Shock absorber specification and features-

Specification

φ30mm tube damper
Dual tube oil loop design
High rigidity φ12.5mm SAE4140 shaft
Wide range of bushing sizes
Heat resistance oil and double seal used
Clevis head is available

Features

Exclusively for dual shock absorbers motorbike
Black body surface treatment
Hyper response reaction
Red spring retainers hard anodized
Preload setting with tool adjusters
Wide range of spring and length

M34 SERIES**M34-N**

Shock absorber specification and features-

Specification

φ34mm damper
Dual tube oil loop design
φ12.5mm SAE4140 shaft
Round head is available
Chrome spring retainers anodized

Features

Exclusively for single or twin shock absorbers scooter
Dual spring rate(optional)
All electroplating chrome body surface treatment
Hyper response performance
Preload setting with tool adjusters
Wide range of spring and length

Spring: Chrome
110lbs/in

Center length:
325mm(optional)

YASUSU SUSPENSION

M36 SERIES

Spring: Black
110lbs/in

Center length:
320mm(optional)

M36-CB

Shock absorber specification and features-

Specification

φ36mm tube body
Dual tube oil loop design
High rigidity φ12.5mm SAE4140 shaft
Wide range of bushing sizes
Double oil seal
Clevis head is available

Features

Exclusively for heavy dual shock absorbers motorbike
Black body surface treatment
Feel comfortable on uneven road
Easy preload setting
Black top metal cover
Wide range of spring and length

M36 SERIES

Spring: Black
800lbs/in

Center length:
250mm(optional)

M36-M

Shock absorber specification and features-

Specification

φ36mm damper body
Dual tube oil loop design and double seal
High rigidity φ12.5mm SAE4140 shaft
φ10mm, φ12mm or φ14mm bushing sizes are available
Heavy spring used

Features

Exclusively for mono shock motorbike
Black body surface treatment
Instant action performance
Easy preload setting with tool adjusters
Wide range of spring and length

NOTE

YASUSU provides all warranty of shock absorbers. There is a free service from malfunction with 12 months in normal use since delivery. During the warranty of period, YASUSU will repair or replace the shocks for free.

Solution


YASUSU has dedicated to producing and developing shocks in any of industries which require shocks on their own products. We have a strong R&D group and business partners for providing specific applications. Please feel free to contact us if the demand had been built.

Limitations

This warranty does not apply to malfunction or oil leakage caused by abuse, modification or use of the product for which it was not intended.

If a problem occurs, please directly contact YASUSU service, and thoroughly describe the nature of the problems.

For more information on using the YASUSU series products with application, please contact our Technical Support Team directly by email to service@yasusu.com

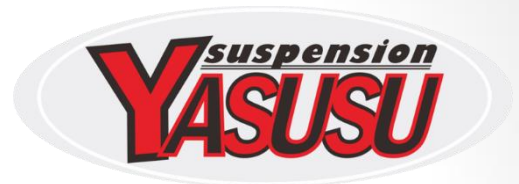

Her Cheng(YASUSU) Co., Ltd.

Tainan, Taiwan (R.O.C.)

www.yasusu.com

